




DEL Packaging, Ltd

Lid Pluggers | Model: CLPS-G Cap Lidding Plugging System - Gluer

This system features a rotary lid plugging system with a glue applicator. A servo in-feed timing screw is utilized to transfer the container from the glue drum roller assembly into the star-wheel and guide assembly of the CLPS-G liddler. The glue roll drum features an external hot oil recirculating system and hot melt glue reservoir. The container travels through a dual-timing screw feed system to tilt the container forward as it spins in the pocket of the timing screw. A fine bead of glue is applied to the inside diameter of the canister as it travels underneath the glue drum roller assembly.


A cap feeding system is integrated with the CLPS-G to provide a continuous flow of caps to the liddler to sustain the required throughput.

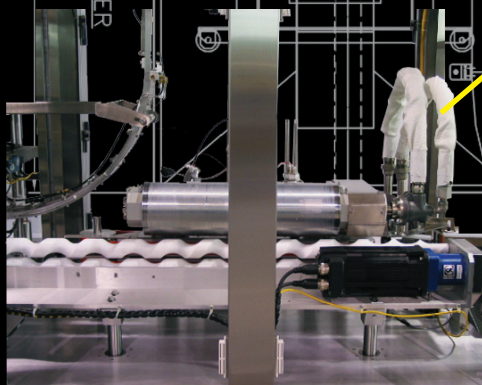


Glue Applicator

Applications

- Straight-walled containers
- Plastic, metal or composite canisters
- 2" - 8" diameter containers and lids/plugs
- 2" - 12" height containers
- Round canisters and lids

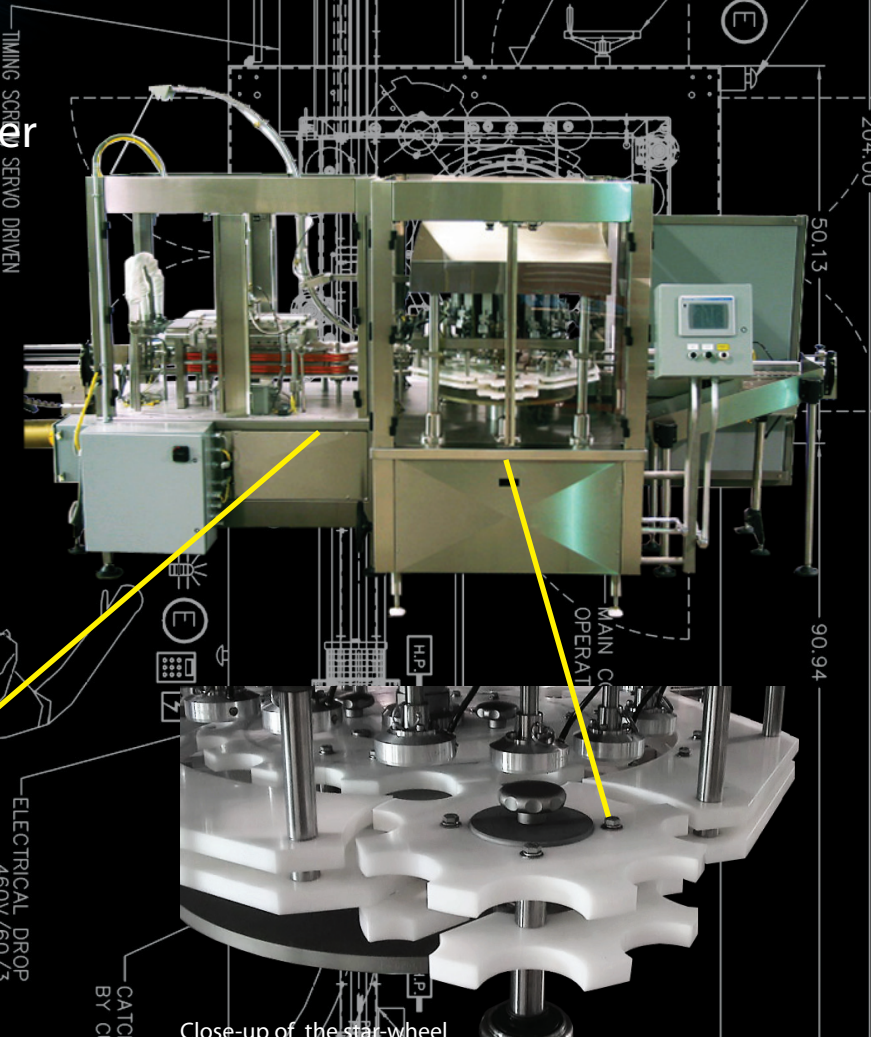

Close-up of the star-wheel

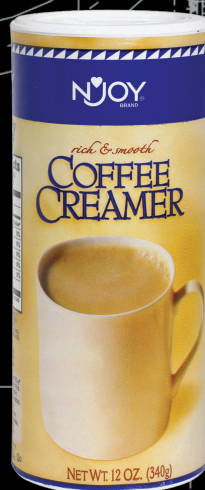


Product names, logos, brands and other trademarks featured are the property of their respective trademark holders

Experience the DEL Difference


Specifications

- Stainless steel shafting, sheet metal (#3 finish), and structural tubing
- 4 1/2" x 15' table top conveyor
- Stainless steel Imperial hardware
- Clear anodized aluminum
- Black oxide chain, pulleys & sprockets
- Dodge Tigear gear boxes & bearings
- SMC Pneumatics
- Clear Polycarbonate guarding
- Plastic articulating foot pads
- Height adjustment kit with digital readout indicator
- THK linear guides
- White virgin Teflon timing screws
- Hand wheel & indicator for height adjustments (3.5" - 9.5" range)

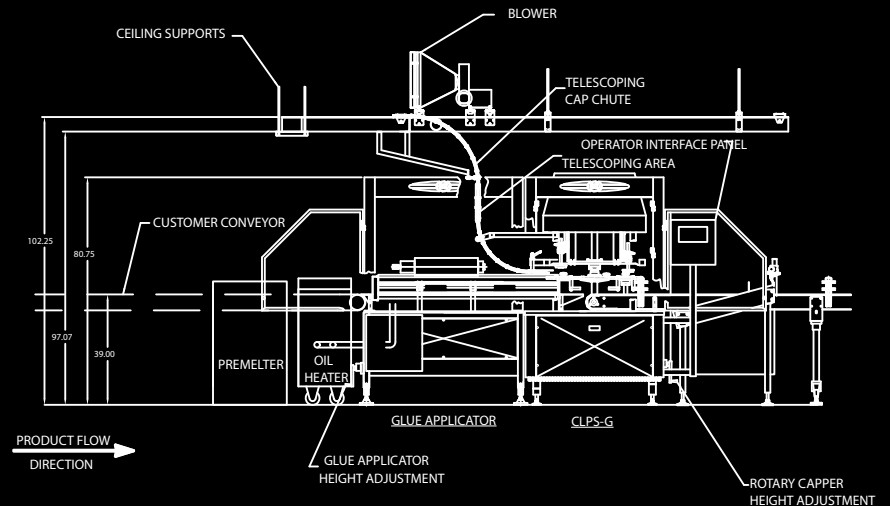

Available Options

- Rotary cap feeder
- Conveyors (table-top, air, etc.)
- Elevator cap sorter feeder
- Stainless Steel (wash-down) construction
- Ethernet and communication modules
- Electrical and control system upgrade
- Digital height and diameter adjust packages
- All domestic and international voltages to meet UL and CE requirements
- Cap detection with reject (fiber optic sensors and/or vision technology)

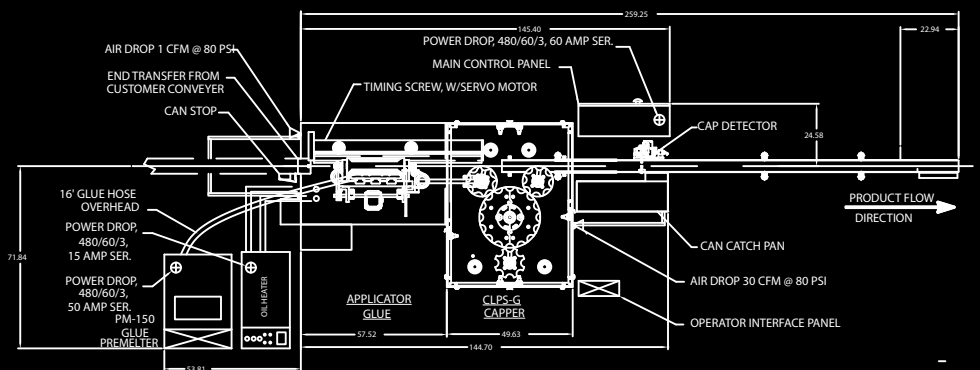

Contact DEL Packaging, Ltd

18113 Telge Road | Cypress, TX 77429

Phone: 281.653.0099 | Fax: 281.653.0082

<http://www.delpackaging.com> | sales@delpackaging.com



Lid Pluggers | Model: CLPS-G